


[Products] you can identify with



Physical Specifications

Material	Painted Black
Size	13.1 x 7.8 x 3.1 IC bump +/-0.5 mm, 0.52 x 0.31 x 0.12 including IC bump +/-0.02 in
Weight (g)	1.6
Attachment	Film Adhesive (included) for placement only in applications exceeding +85c

Dimensions

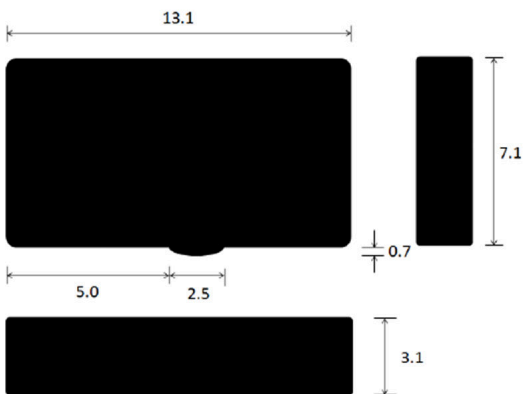

Measurements shown in mm

Fit 400 HT

The Fit 400 is a small form factor, High Temperature RFID tag capable of surviving cycling applications with temperatures to 235oC. Don't sacrifice performance for size. With up to a 4 meter read range, the Fit 400 is the perfect solution when space is limited, but performance is demanded.




RF Specifications

Radio Protocol	EPC Class 1 Gen2v2
Frequency Range	866 – 868 MHz (EU) 902 – 928 MHz (US)
Read Range – Fixed Reader	Up to 4m (13.1 feet)
Read Range – Handheld Reader	Up to 2m (6.5 feet)
On Metal or Balanced	Optimized for metal
Material Compatibility	Metal
IC Type (Chip)	Alien Higgs 3
Memory	EPC - 96 bits User - 512 bits Unique TID - 64 bits


EPC and User memory are reprogrammable. UTID is locked at point of manufacture by IC manufacturer.

Radiation Patterns

Off Metal

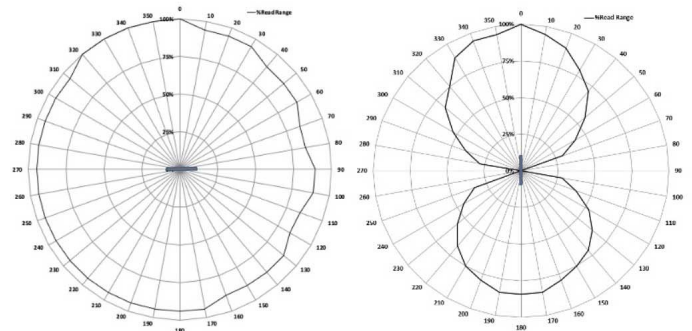

[Products] you can identify with

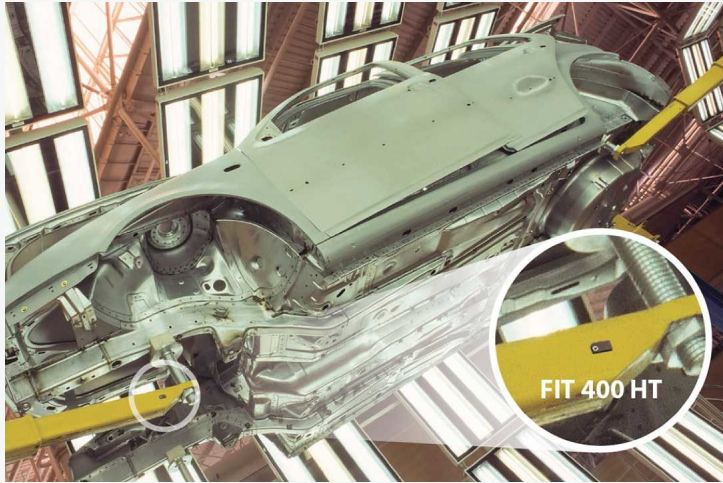

With its small form, high temperature capability and high performance, the Omni-ID Fit 400 tags are ideally suited to tracking small metal assets such as:

- Metal hand tools
- Embedding into metal components
- Metal IT assets including covert tracking
- Autoclaves and high temperature sterilizations

Certifications

CE, RoHS, Ex, ATEX/IECEX certified (option), US&Canada (C1D1/D2) certified (option)



Environmental Specifications

Operating Temperature	-20°C to +85°C
Max Temperature Exposure	-20°C to +235°C
IP Rating	IP68

Ordering Information

Warranty	1 year
Product Options	:304 (ATEX/IECEX certified) :307 (US&Canada (C1D1/D2) certified) :508 (premium foam) :701 (Standard Service Bureau)
Part Number / Order Codes / Order Numbers	124 (EU, US)